



VERTICAL BEVEL-CUTTING MACHINE TYPE VSH MANUAL OPERATION

FOR FLEXIBLE AND RIGID FOAMS, MINERAL WOOL
AND LIGHT BONDED FOAM

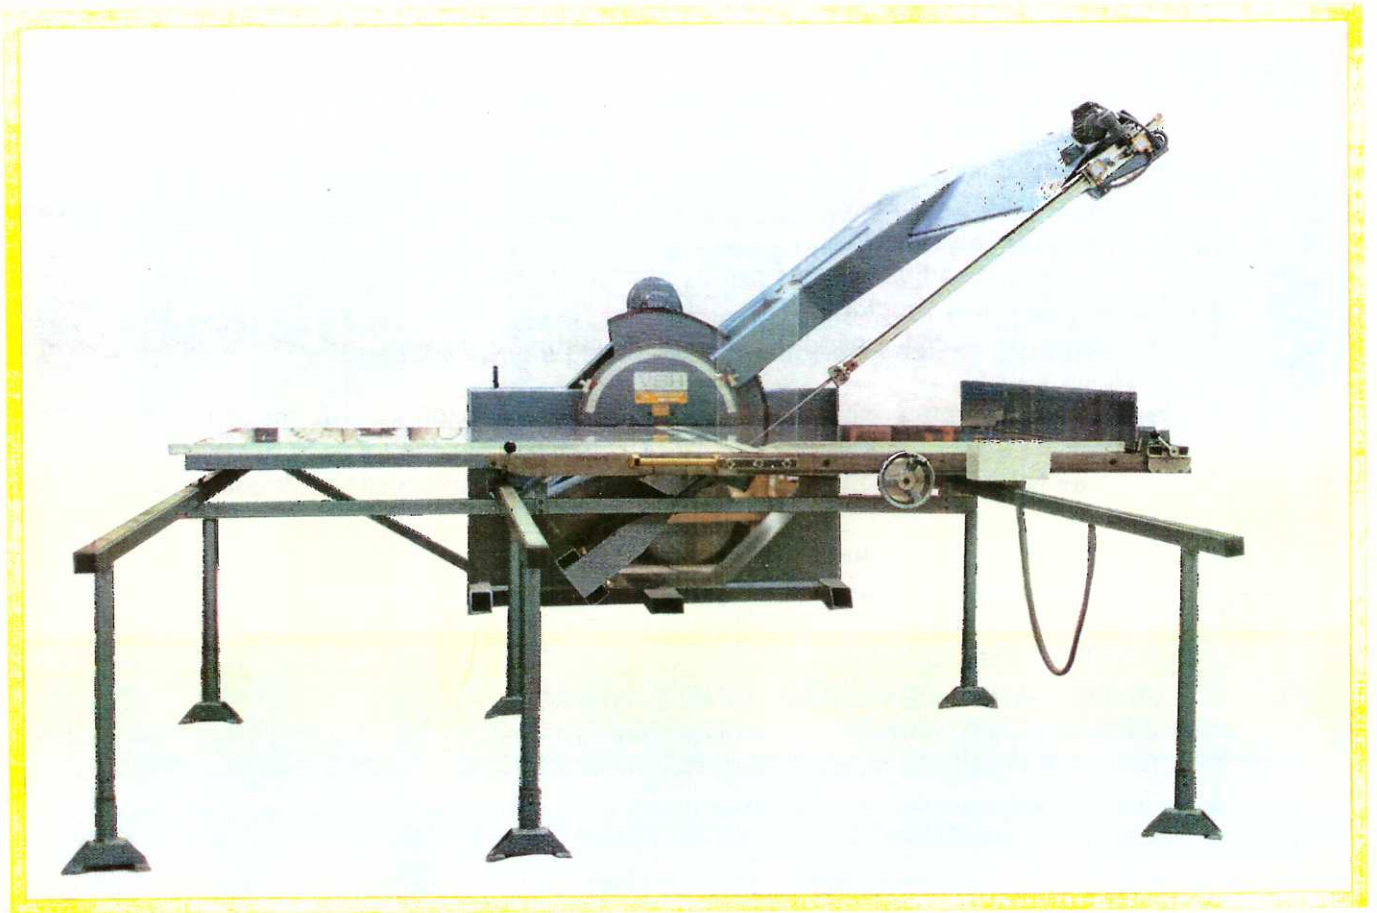

A robust and very versatile machine for ordinary vertical cutting and bevel-cutting at all angles. Equipped with bandknife for the conversion of all flexible foams, and with bandsaw for rigid foams and mineral wool. An indispensable machine for the manufacture of all fashioned shapes.

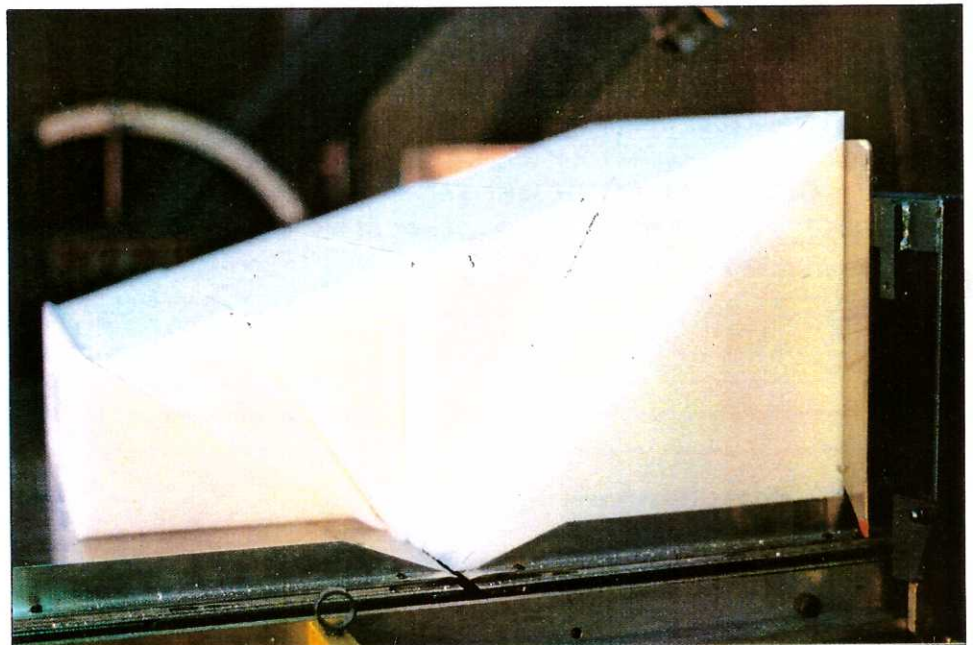

HYMA Sheet no: VSH-F001gb/9309

The company policy aims at continuous improvement of the products, and therefore all rights to change the design and specifications without notice are reserved.

**VERTICAL- AND BEVEL CUTTING MACHINE
TYPE VSH – MANUAL OPERATION
FOR FLEXIBLE FOAM AND LIGHT BONDED FOAM**



STANDARD EQUIPMENT:

- * Manually operated roller table with aluminium covered table-top.
- * Hand-wheel operated rest-plate with ratchet mechanism for repetitive cutting of same width: 0-130 mm.
- * Inclinable cutting section with four dynamic balanced blade-wheels, each suspended between two adjustable bearings.
- * Motorised angle-adjustment of cutting section: +/- 67 degrees.
- * Electric blade drive motor.
- * Twisted double-edge ground band knife for cutting in forward and reverse movement of roller table.
- * Blade tension control with indication lamp and automatic cut-off on blade slackness and - breakage.
- * Manually height-adjustable blade guard and fine-adjustable blade guide rollers above and below table.
- * Friction grinding apparatus with two adjustable cupstones.
- * Electrical control box mounted on table front, adjacent to operator.

STANDARD DIMENSIONS:

- * Cutting length: 2450 mm
- * Table width left of blade: 1250 mm
- * Table width right of blade: 1250 mm
- * Cutting height: 1250 mm
- * Rest-plate height: 200 mm

POWER SUPPLY:

- * 380 Volts, Three-Phase, Neutral, 50 Cycles, 1,6 KW.

ALTERNATIVE DIMENSIONS:

- * Table width left of blade: 1500 mm or 2000 mm
- * Table width right of blade: 1500 mm or 2000 mm

OPTIONAL EQUIPMENT:

- * Motorised height-adjustment of blade guard and fine-adjustable blade guide rollers above and below table.

SPECIFICATION SHEET NO.: VSH-9121GB

The company policy aims at continuous improvement of the products, and therefore all rights to change the design and specifications without notice are reserved.

Head office: HYMA Engineering A/S, Industrivænget 19-21, DK-4622 Havdrup, Denmark. Tel. +45-42-385700. Fax +45-42-385991. Tlx. 43146 hyma dk
Subsidiary: HYMA (UK) Ltd., Oldham OL9 9ND, England. Tel. 061-6204137/8. Fax 061-6270713. Tlx. 669247 hyma uk